



# Anaerobic Medium Strength Threadlocker 121

## Product Data Sheet

### Product Description

VIBRA-TITE 121 is a medium strength, anaerobic thread locking compound. VIBRA-TITE 121 is designed for locking threaded fasteners that require disassembly with standard hand tools. The product performs on aluminum, steel, plated parts, stainless steel, and special alloy parts. VIBRA-TITE 121 exhibits good temperature and is solvent resistant.

### Typical Applications

VIBRA-TITE 121 will lock and seal fasteners, and set screws. VIBRA-TITE 121 is used in applications where shock and vibration may cause the fastener to loosen.


### Properties of Uncured Material

Chemical Type	Anaerobic
Appearance	Blue
Toxicity	Low
Solids	100%
Viscosity @ 25°C, cPs	
Brookfield RVT,	
Spindle 3 @ 20 rpm	900-1500
Specific Gravity	1.00

### Typical Curing Performance

#### Cure Speed

The cure speed is dependant on temperature and substrate. The graph below shows the Breakaway Strength on M-10 Steel, Phosphate/oil, and Zinc finishes.

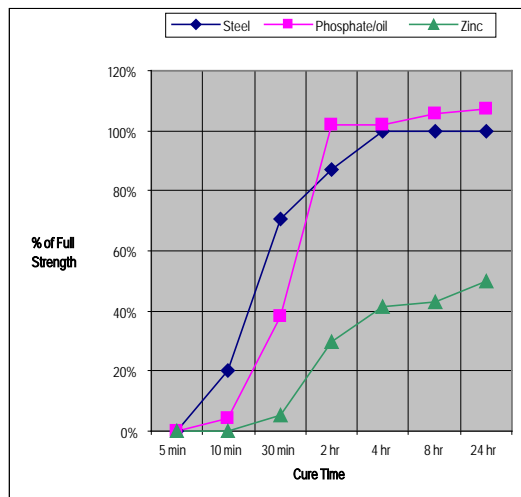

### Performance of Cured Material

	Typical Values
Fixture Time	15-20 min @ 72°F
Full Cure Time	24 hrs @ 72°F
Temperature Range	-60°F to 300°F (-51°C to 150°C)

### Breakaway Strength

3/8" Plain Steel nut and bolt @ 1 hr	50-150 lb <sub>f</sub> -in
3/8" Plain Steel nut and bolt @ 24 hr	75-150 lb <sub>f</sub> -in
3/8" Zinc nut and bolt @ 24 hr	60-100 lb <sub>f</sub> -in

### Environmental and Fluid Resistance (Shear strength values)

	Typical Values
Heat age	100%
Engine oil @ 150°C	100%
Brake fluid @ 150°C	100%
ATF @ 150°C	85%
50/50 water/ ethylene glycol @ 120°C	80%
Water @ 100°C	80%
Gasoline @ 25°C	95%
Diesel fuel @ 25°C	100%
Ethyl Alcohol @ 25°C	95%

### Instructions for Use

Ensure parts are clean, dry and free from oil and grease.

### Compatible Primers

Primers such as Vibra-TITE Excel 611 (Primer N) or Excel 612 (Primer T) can be used to speed the fixture time of the adhesive. Fixture times can improve by as much as 50%. The use of primers can result in lower strength and performance should be tested after full cure.

### Presentation

Bottles.....2ml, 10ml, 50ml, 250ml and liter



Anaerobic  
Medium Strength Threadlocker  
121  
Product Data Sheet

## General Information

### Storage

Product should be stored in a cool and dry location at temperatures between -10 °C to 30 °C. Optimal storage is 22±4°C. Shelf life is 18 months from date of manufacture when stored at 22±4°C.

### Note

Vibra-TITE 121 is recommended for threaded components under 1" in diameter. Components can be disassembled using conventional hand tools. It is color coded blue and once cured, seals and vibration proofs the assembly giving controlled breakaway and prevailing torques.

Product conforms to MIL-S-46163A, ASTM D-5363, NSF.

### Health & Safety in use

IRRITANT: Contains Methacrylate Esters which may irritate eyes, respiratory organs and skin. In case of contact with the skin, wash immediately with plenty of water.